



ABOVEGROUND SYSTEMS

Aquascape®
Agua para el futuro

CLEAN AND CLEAR® FILTER SYSTEMS

ABOVEGROUND CARTRIDGE POOL SYSTEMS



Clean & Clear
Filter System

The Clean & Clear Filter System pairs the OptiFlo® Pump with the Clean & Clear Cartridge Filter, a high quality filtration unit using a thermoplastic chemical-resistant tank. All models are equipped with easy spin-on unions for plumbing hookups.

CALIFORNIA PROPOSITION 65 WARNING
 ⚠️ WARNING: Cancer and Reproductive Harm.
 ⚠️ AVERTISSEMENT: Peut Causer le Cancer et des Dommages au Système Reproducteur.
 ⚠️ ADVERTENCIA: Cáncer y Daño Reproductivo.
 www.p65warnings.ca.gov.

Featured Highlights

- Unionized pump and filter connections
- Integrated continuous High Flow™ Internal Air Relief¹
- Lock ring with spring-loaded safety latches
- Coreless media for easy cleaning
- High Flow manual air relief valve
- 1-inch drain and wash out
- Single piece base and body design

Ordering Information

Product	Pump HP	Pump Cord	Hose Kit (Ft.)	Effective Filtration Area (Sq. Ft.)	Flow ² Rate (GPM)	Turnover Capacity (In Gallons) ²			Tank Diameter (In.)	Tank Height (In.)
						8 Hour	10 Hour	12 Hour		
CLEAN AND CLEAR SYSTEM										
PNCC0050OD1160	3/4	3 ft. STD	6	50	50	24,000	30,000	36,000	15-1/2	18
PNCC0050OE1160	1	3 ft. STD	6	50	50	24,000	30,000	36,000	15-1/2	18
PNCC0075OE1160	1	3 ft. STD	6	75	75	36,000	45,000	54,000	15-1/2	25-1/2
PNCC0075OE1260	1	3 ft. TWL	6	75	75	36,000	45,000	54,000	15-1/2	25-1/2
PNCC0100OE1160	1	3 ft. STD	6	100	100	48,000	60,000	72,000	15-1/2	33
PNCC0100OF1160	1-1/2	3 ft. STD	6	100	100	48,000	60,000	72,000	15-1/2	33
PNCC0100OF1260	1-1/2	3 ft. TWL	6	100	100	48,000	60,000	72,000	15-1/2	33
PNCC0100OF2160	1-1/2 *	3 ft. STD	6	100	100	48,000	60,000	72,000	15-1/2	33
PNCC0100OF2260	1-1/2 *	3 ft. TWL	6	100	100	48,000	60,000	72,000	15-1/2	33
PNCC0100OO1160	1-1/2	3 ft. STD	6	100	100	48,000	60,000	72,000	15-1/2	33
PNCC0100OO1260	1-1/2	3 ft. TWL	6	100	100	48,000	60,000	72,000	15-1/2	33
PNCC0100OO2160	1-1/2*	3 ft. STD	6	100	100	48,000	60,000	72,000	15-1/2	33
PNCC0100OO2260	1-1/2*	3 ft. TWL	6	100	100	48,000	60,000	72,000	15-1/2	33
PNCC0125OF1160	1-1/2	3 ft. STD	6	125	125	60,000	75,000	90,000	15-1/2	33
PNCC0150OF1160	1-1/2	3 ft. STD	6	150	150	72,000	90,000	108,000	15-1/2	40-1/2
PNCC0150OF1260	1-1/2	3 ft. TWL	6	150	150	72,000	90,000	108,000	15-1/2	40-1/2
PNCC0150OF2160	1-1/2 *	3 ft. STD	6	150	150	72,000	90,000	108,000	15-1/2	40-1/2
PNCC0150OF2260	1-1/2 *	3 ft. TWL	6	150	150	72,000	90,000	108,000	15-1/2	40-1/2
PNCC0150OP1160	2	3 ft. STD	6	150	150	72,000	90,000	108,000	15-1/2	40-1/2
PNCC0150OP1260	2	3 ft. TWL	6	150	150	72,000	90,000	108,000	15-1/2	40-1/2
PNCC0150OP2160	2*	3 ft. STD	6	150	150	72,000	90,000	108,000	15-1/2	40-1/2
PNCC0150OP2260	2*	3 ft. TWL	6	150	150	72,000	90,000	108,000	15-1/2	40-1/2
PNCC0175OF1160	1-1/2	3 ft. STD	6	175	150	72,000	90,000	108,000	15-1/2	40-1/2
PNCC0200OP1160	2	3 ft. STD	6	200	150	72,000	90,000	108,000	15-1/2	40-1/2
ACCESSORIES										
PNBKCCWROXXXX0 Base Kit with pump to filter connection for Clean & Clear and Optiflo Pump										

* 2 Speed Pump.

¹ Integrated continuous High Flow internal air relief is operational only when there is unobstructed flow in the circulating system.

² Flow Rate and Turnover Capacity based on Filter.

See pages 313 for replacement parts.

Dimensions and Performance

Certified to
NSF/ANSI Standard 50

Clean & Clear Filter



OptiFlo Pump

PREDATOR™ II MINI-CELLULAR MEDIA FILTER SYSTEM

ABOVEGROUND CARTRIDGE POOL SYSTEM

Featured Highlights

- Predator II Mini-Cellular Media System for small aboveground pools
- Proven aboveground pump

The Predator II Mini-Cellular Media System offers a smaller 25 sq. ft. filter and 40 GPM pump without pot.



Predator II Mini-Cellular Media Filter System

CALIFORNIA PROPOSITION 65 WARNING

⚠ WARNING: Cancer and Reproductive Harm.

⚠ AVERTISSEMENT: Peut Causer le Cancer et des Dommages au Système Reproducteur.

⚠ ADVERTENCIA: Cáncer y Daño Reproductivo.

www.p65warnings.ca.gov

PR220714

Ordering Information

Product	Tank Diameter (In.)	Effective Filtration Area (Sq. Ft.)	Flow Rate (GPM)	Turnover Capacity (In Gallons)			Carton Wt. (Lbs.)
				8 Hour	10 Hour	12 Hour	
PREDATOR II MINI-CELLULAR MEDIA FILTER SYSTEM							
56224800	15	25	40	19,200	24,000	28,800	50

Dimensions and Performance

Aqua Integral

Agua para el futuro



PLM SERIES FILTER SYSTEMS

ABOVEGROUND MODULAR MEDIA FILTER SYSTEM



TRADEGRADE



PLM Series Systems
shown with OptiFlo® Pump

Featured Highlights

- Compact Design – Fits easily in tight installations. Sleek-looking in matte black finish.
- Easy Access – The Posi-Lok™ Locking Ring is easy to use. Split-tank design permits rinse-in-place cleaning.
- Superior Dirt Loading – Flow-balanced tank hydraulics direct water through each side of filter module. Uniform dirt-loading prevents clogging.
- Easy Reading – Information panels and top-mounted pressure gauge are positioned for easy reading
- Power Options – 1 to 1-1/2 HP OptiFlo

Convenience and virtually maintenance-free operation make this aboveground system a smart choice. Featuring Sta-Rite's modular media technology, these systems handle dirt loads of up to 15 times more than sand filters of equivalent size. Available with rugged, large-capacity OptiFlo Series pump.

CALIFORNIA PROPOSITION 65 WARNING

⚠ WARNING: Cancer and Reproductive Harm.
⚠ AVERTISSEMENT: Peut Causer le Cancer et des Dommages au Système Reproducteur.
⚠ ADVERTENCIA: Cáncer y Daño Reproductivo.
www.p65warnings.ca.gov P65-00011A

Ordering Information

Product	Pump HP	Pump Cord	Hose Kit (Ft.)	Effective Filtration Area (Sq. Ft.)	Flow ¹ Rate (GPM)	Turnover Capacity (In Gallons) ¹			Tank Diameter (In.)	Tank Height (In.)
						8 Hour	10 Hour	12 Hour		
PLM SERIES FILTER SYSTEMS										
SRPLM100OE1160	1	3 ft. STD	6	100	100	48,000	60,000	72,000	15	28 [®]
SRPLM100OE1260	1	3 ft. TWL	6	100	100	48,000	60,000	72,000	15	28
SRPLM100OF1160	1-1/2	3 ft. STD	6	100	100	48,000	60,000	72,000	15	28
SRPLM100OF1260	1-1/2	3 ft. TWL	6	100	100	48,000	60,000	72,000	15	28
SRPLM150OE1160	1	3 ft. STD	6	150	150	72,000	90,000	108,000	15	28
SRPLM150OE1260	1	3 ft. TWL	6	150	150	72,000	90,000	108,000	15	28
SRPLM150OF1160	1-1/2	3 ft. STD	6	150	150	72,000	90,000	108,000	15	28
SRPLM100OE13X0	1	25 ft. STD	N/A	100	100	48,000	60,000	72,000	15	28
SRPLM150OF13X0	1-1/2	25 ft. STD	N/A	150	150	72,000	90,000	108,000	15	28
SRPLM200OP2260	2	3 ft. TWL	6	200	200	72,000	90,000	108,000	15	28

¹ Flow Rate and Turnover Capacity based on Filter.

Note: Operating Limits – designed for maximum continual working pressure of 50 PSI. Water temperature maximum 104°F (40°C).

Dimensions and Performance

OptiFlo Pump

OptiFlo Pump

PLM Filter



Certified to
NSF/ANSI Standard 50

PLD SERIES FILTER SYSTEMS

ABOVEGROUND MODULAR D.E. FILTER SYSTEM


TRADEGRADE

Featured Highlights

- **Easy-Open Convenience** – The Posi-Lok™ Locking Ring provides easy access for seasonal cleaning. Simply unscrew the ring and lift.
- **Holds More Dirt** – The modular-design filters incorporate a balanced-flow tank design that directs water through both sides of the modules, using every inch of its pleated surface
- **Ready to Go** – Complete system includes the Mod D.E. filter and a performance-matched pump that's ready for easy assembly on a tool-free platform



PLD Series Systems
shown with OptiFlo® Pump

Sta-Rite combines outstanding water purity and carefree operation in a system package. Evolution of the proven modular media technology delivers D.E. filtration in a simple, one-piece module design. Available with rugged, large-capacity OptiFlo Series pump.

CALIFORNIA PROPOSITION 65 WARNING

⚠ **WARNING:** Cancer and Reproductive Harm.
⚠ **AVERTISSEMENT:** Peut Causer le Cancer
et des Dommages au Système Reproducteur.
⚠ **ADVERTENCIA:** Cáncer y Daño Reproductivo.
www.p65warnings.ca.gov P19-201701-A

Ordering Information

Product	Pump HP	Pump Cord	Hose Kit (Ft.)	Effective Filtration Area (Sq. Ft.)	Flow ¹ Rate (GPM)	Turnover Capacity (In Gallons) ¹			D.E. Required (Lbs.)	Tank Diameter (In.)	Tank Height (In.)
						8 Hour	10 Hour	12 Hour			
PLD SERIES FILTER SYSTEMS											
SRPLD050OE1160	1	3 ft. STD	6	30	60	29,000	36,000	43,000	6	15	28 [®]
SRPLD050OE1260	1	3 ft. TWL	6	30	60	29,000	36,000	43,000	6	15	28
SRPLD050OF2161	1-1/2	3 ft. STD	6	30	90	45,200	54,000	64,800	6	15	28

¹ Flow Rate and Turnover Capacity based on Filter.

Note: Operating Limits – designed for maximum continual working pressure of 50 PSI. Water temperature maximum 104°F (40°C). D.E. required: 6 lbs.

Dimensions and Performance

PLD Filter



OptiFlo Pump



EASYSYSTEM™ D.E. FILTER SYSTEMS

ABOVEGROUND D.E. POOL SYSTEMS



EasyClean D.E. Filter System

The EasyClean D.E. Filter System pairs the OptiFlo® Pump with the EasyClean D.E. Filter to create this high performance system for aboveground pools. Rugged, efficient and simple to operate. The EasyClean D.E. Filter System comes in a variety of sizes and horsepower to suit any aboveground pool configuration.

Featured Highlights

- Removable cartridge-style D.E. element for quick, convenient cleaning
- Automatically regenerates D.E. media during off cycle and start-up
- High Flow™ Manual Air Relief valve and continuous internal air relief work together to help eliminate air accumulation and maintain optimum filtration efficiency in single and two-speed models ¹
- Filter lock ring allows for quick and easy servicing

CALIFORNIA PROPOSITION 65 WARNING

⚠ **WARNING:** Cancer and Reproductive Harm.
 ⚠ **AVERTISSEMENT:** Peut Causer le Cancer et des Dommages au Système Reproducteur.
 ⚠ **ADVERTENCIA:** Cáncer y Daño Reproductivo.
www.p65warnings.ca.gov

Ordering Information

Product	Pump HP	Pump Cord	Hose Kit (Ft.)	Effective Filtration Area (Sq. Ft.)	Flow ¹ Rate (GPM)	Turnover Capacity (In Gallons) ²			D.E. Required (Lbs.)	Tank Diameter (In.)	Tank Height (In.)
						8 Hour	10 Hour	12 Hour			
EASYSYSTEM FILTER SYSTEMS											
PNEC0060OE1160	1	3 ft. STD	6	15	60	28,800	36,000	43,200	1-1/2	15-1/2	25-1/2
PNEC0060OE1260	1	3 ft. TWL	6	15	60	28,800	36,000	43,200	1-1/2	15-1/2	25-1/2
PNEC0060OE2160	1 *	3 ft. STD	6	15	60	28,800	36,000	43,200	1-1/2	15-1/2	25-1/2
PNEC0060OE2260	1 *	3 ft. TWL	6	15	60	28,800	36,000	43,200	1-1/2	15-1/2	25-1/2
PNEC0090OF1160	1-1/2	3 ft. STD	6	30	90	43,200	54,000	64,800	3	15-1/2	40-1/2
PNEC0090OF1260	1-1/2	3 ft. TWL	6	30	90	43,200	54,000	64,800	3	15-1/2	40-1/2
PNEC0090OF2160	1-1/2 *	3 ft. STD	6	30	90	43,200	54,000	64,800	3	15-1/2	40-1/2
PNEC0090OF2260	1-1/2 *	3 ft. TWL	6	30	90	43,200	54,000	64,800	3	15-1/2	40-1/2

* 2 Speed Pump.

¹ Integrated continuous High Flow internal air relief is operational only when there is unobstructed flow in the circulating system.

² Flow Rate and Turnover Capacity based on Filter.

Dimensions and Performance

OptiFlo Pump



See page 318 for replacement parts.

SAND DOLLAR® FILTER SYSTEMS

SAND FILTER SYSTEM WITH BLOW-MOLDED TANK

Featured Highlights

- Six-position 1-1/2 in. multiport valve
- Self-priming Dynamo® Pumps in 3/4, 1, 1-1/2 and 2 HP ratings
- Our innovative process creates a one-piece, non-corrosive tank of superior strength and durability even in the most demanding of applications
- Combination water and sand drain makes servicing and winterizing fast and easy
- Unionized Pump to Filter connection

CALIFORNIA PROPOSITION 65 WARNING

⚠ WARNING: Cancer and Reproductive Harm.
 ⚠ AVERTISSEMENT: Peut Causer le Cancer
 et des Dommages au Système Reproducteur.
 ⚠ ADVERTENCIA: Cáncer y Daño Reproductivo.
www.p65warnings.ca.gov

Sand Dollar Filter System

Our blow-molded process creates a one piece, non-corrosive tank of unequaled strength and durability. This pump and filter system provides excellent performance at an affordable price.

Ordering Information

Product	Pump HP	Pump Cord	Hose Kit (Ft.)	Effective Filtration Area (Sq.Ft.)	Flow ¹ Rate (GPM)	Turnover Capacity (In Gallons) ¹			Sand Required (Lbs.)	Tank Diameter (In.)	Tank Height (In.)
						8 Hour	10 Hour	12 Hour			
SAND DOLLAR FILTER SYSTEMS											
PNSD0035DD1160	3/4	3 ft. STD	6	1.4	35	16,800	21,000	25,200	100	16	28-1/2
PNSD0035DD11X0	3/4	3 ft. STD	N/A	1.4	35	16,800	21,000	25,200	100	16	28-1/2
PNSD0035DE1160	1	3 ft. STD	6	1.4	35	16,800	21,000	25,200	100	16	28-1/2
PNSD0035DE2160	1 *	3 ft. STD	6	1.4	35	16,800	21,000	25,200	100	16	28-1/2
PNSD0040DE1160	1	3 ft. STD	6	1.8	40	19,200	24,000	28,800	150	19	34
PNSD0040DE11X0	1	3 ft. STD	N/A	1.8	40	19,200	24,000	28,800	150	19	34
PNSD0040DE1260	1	3 ft. TWL	6	1.8	40	19,200	24,000	28,800	150	19	34
PNSD0040DO1160	1-1/2	3 ft. STD	6	1.8	40	19,200	24,000	28,800	150	19	34
PNSD0040DO11X0	1-1/2	3 ft. STD	N/A	1.8	40	19,200	24,000	28,800	150	19	34
PNSD0040DO1260	1-1/2	3 ft. TWL	6	1.8	40	19,200	24,000	28,800	150	19	34
PNSD0040DO2160	1-1/2 *	3 ft. STD	6	1.8	40	19,200	24,000	28,800	150	19	34
PNSD0060DO1160	1-1/2	3 ft. STD	6	2.3	60	28,800	36,000	43,200	250	22	35-1/2
PNSD0060DO11X0	1-1/2	3 ft. STD	N/A	2.3	60	28,800	36,000	43,200	250	22	35-1/2
PNSD0060DO1260	1-1/2	3 ft. TWL	6	2.3	60	28,800	36,000	43,200	250	22	35-1/2
PNSD0060DO2260	1-1/2 *	3 ft. TWL	6	2.3	60	28,800	36,000	43,200	250	22	35-1/2
PNSD0060DP1160	2	3 ft. STD	6	2.3	60	28,800	36,000	43,200	250	22	35-1/2
PNSD0060DP2160	2*	3 ft. STD	6	2.3	60	28,800	36,000	43,200	250	22	35-1/2

* 2 Speed Pump.

¹ Flow Rate and Turnover Capacity based on Filter.

Dimensions and Performance

Dynamo Pump



See pages 320 for replacement parts.

CRISTAL-FLO™ II FILTER SYSTEMS

ABOVEGROUND SAND FILTER SYSTEM



TRADEGRADE



Cristal-Flo II Filter System
shown with Dynamo® Pump

Easy-maintenance sand filter system with the rugged, large capacity Dynamo Series pump. Low maintenance and simple installation make this system the choice for many applications.

Featured Highlights

- Less Maintenance – Enjoy greater time between cleanings. The tank's sophisticated design distributes water evenly to maximize efficiency throughout filtration media.
- One-piece polyethylene tank will never corrode
- Multi-port valve selector activates backwashing action with one quick turn
- Easy-to-read top-mounted pressure gauge
- Unionized pump to filter connection allows for easy installation and servicing

Ordering Information

Product	Pump HP	Pump Cord	Hose Kit (Ft.)	Effective Filtration Area (Sq. Ft.)	Flow ¹ Rate (GPM)	Turnover Capacity (In Gallons) ¹			Sand Required (Lbs.)	Tank Diameter (In.)	Tank Height (In.)
						8 Hour	10 Hour	12 Hour			
CRISTAL-FLO II FILTER SYSTEMS											
SRCF2016DN1160	1	3 ft. STD	6	1.4	35	16,800	21,000	25,200	100	16	28-1/2
SRCF2019DD1260	3/4	3 ft. TWL	6	1.8	40	19,200	24,000	28,800	150	19	34
SRCF2019DE1160	1	3 ft. STD	6	1.8	40	19,200	24,000	28,800	150	19	34
SRCF2019DE1260	1	3 ft. TWL	6	1.8	40	19,200	24,000	28,800	150	19	34
SRCF2019DN1160	1	3 ft. STD	6	1.8	40	19,200	24,000	28,800	150	19	34
SRCF2019DO1160	1-1/2	3 ft. STD	6	1.8	40	19,200	24,000	28,800	150	19	34
SRCF2019DO1260	1-1/2	3 ft. TWL	6	1.8	40	19,200	24,000	28,800	150	19	34
SRCF2022DE1260	1	3 ft. TWL	6	2.3	60	28,800	36,000	43,200	250	22	35-1/2
SRCF2022DF1260	1-1/2	3 ft. TWL	6	2.3	60	28,800	36,000	43,200	250	22	35-1/2
SRCF2022DO1160	1-1/2	3 ft. STD	6	2.3	60	28,800	36,000	43,200	250	22	35-1/2
SRCF2022DO1260	1-1/2	3 ft. TWL	6	2.3	60	28,800	36,000	43,200	250	22	35-1/2
SRCF2022DO2160	1-1/2 *	3 ft. STD	6	2.3	60	28,800	36,000	43,200	250	22	35-1/2

* 2 Speed Pump.

¹ Flow Rate and Turnover Capacity based on Filter.

Note: Operating Limits – designed for maximum continual working pressure of 35 PSI.

Dimensions and Performance

Dynamo Pump



CALIFORNIA PROPOSITION 65 WARNING

⚠ WARNING: Cancer and Reproductive Harm.
 ⚠ AVERTISSEMENT: Peut Causer le Cancer et des Dommages au Système Reproducteur.
 ⚠ ADVERTENCIA: Cáncer y Daño Reproductivo.
www.p65warnings.ca.gov

PR020114

ACCESSORIES

FOR ABOVEGROUND SYSTEMS

A suitable ground fault interrupter (GFCI) should always be installed on aboveground system equipment.



AquaLuminator 98600000



3 ft. Twist Lock cord 155234



6 ft. Hose Kit 155151
12 ft. Hose Kit 155005



Sand Vac 542090

Product	Description
ACCESSORIES	
79137800	3 ft. Standard cord
155234	3 ft. cord with twist lock
155151	1-1/2 in. x 6 ft. hose kit, (to and from pool)
155005	1-1/2 in. x 12 ft. hose kit, (to and from pool)
150046	Hose adapter 1-1/2 in. NPT with Chlorinator connector
542413	Aboveground wall fitting 1-1/2 THD x 1-1/2 THD-white
542414	Aboveground wall fitting 1-1/2 THD x 1-1/2 socket-white
98600000	AquaLuminator aboveground light
98610002	AquaLuminator aboveground light - (Canada CSA) certified
K50600	Kreepy Krauly E-Z Vac Pool Cleaner
360100	Kreepy Krauly 'Lil Shark Pool Cleaner
360321	Kreepy Krauly 910 Robotic Aboveground Cleaner
542090	Sand Vac - empties a sand filter in 10 min for repair, refilling or removal
R171016	300 Series Off-Line Chlorinator Feeder
98605300	Quasar Non-Return Light
79203100	Adapter to connect AquaLuminator to cleaner
79100000Z	Fountain attachment, fits all AquaLuminator models
79202900	Hard plumbing adapter

300 Series
Chlorinator/
Feeder R171016




CALIFORNIA PROPOSITION 65 WARNING

⚠ **WARNING:** Cancer and Reproductive Harm.
⚠ **AVERTISSEMENT:** Peut Causer le Cancer et des Dommages au Système Reproducteur.
⚠ **ADVERTENCIA:** Cáncer y Daño Reproductivo.
www.p65warnings.ca.gov

Quasar Non-return light
for Aboveground Pools
98605300



Hard
Plumbing
Adapter




Pressure
Cleaner
Adapter



Fountain
Attachment

PART NUMBERING SCHEME FOR ABOVEGROUND SYSTEMS

ex. PNSD0035DD1160

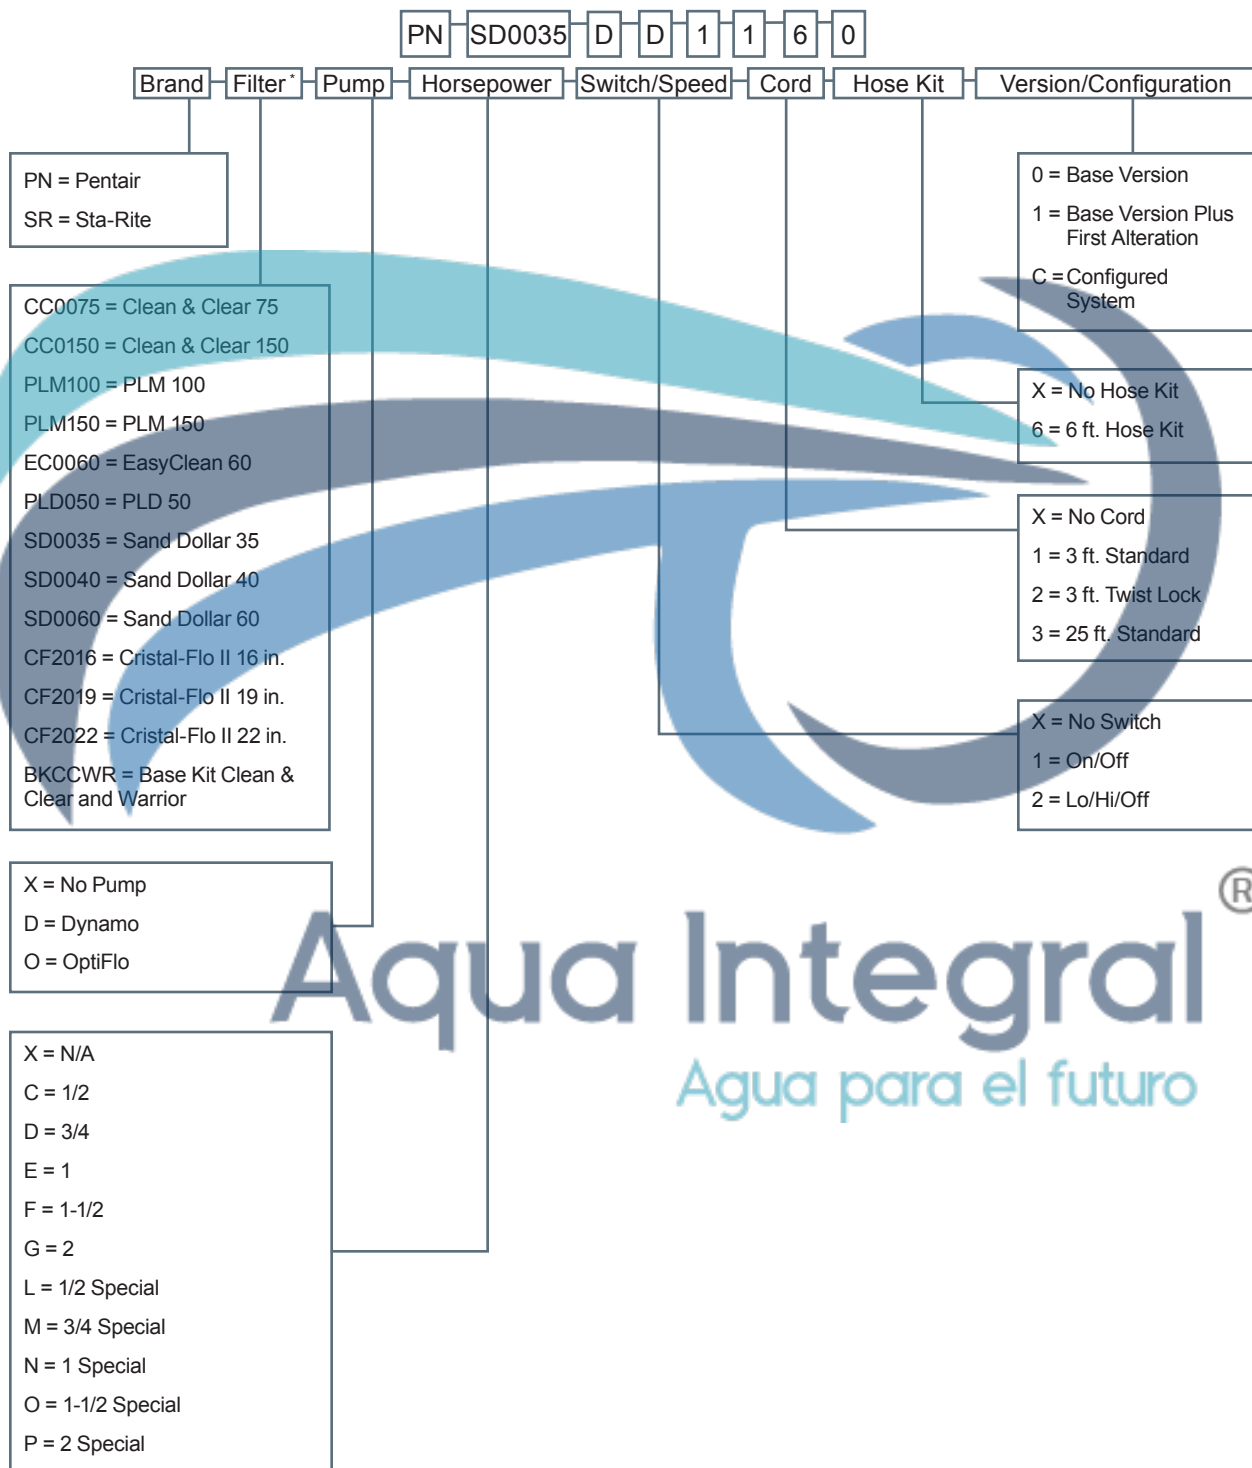

* Filter list may not represent all available types and sizes.